

The 'Asraam' range of surface linear and modular luminaires are designed to utilise the advantages of T5 lamp technology making it ideally suited for the modern interior.

The canopy is constructed from extruded aluminium sides with laser cut endplates finished RAL9010 20% gloss, creating a sleek and pleasing profile. Alternative paint finishes available on request.

Diversity is further enhanced with three backplate formats allowing for direct surface mount; 10% uplighting and 30% uplighting.

Fused high frequency control gear is offered as standard with analogue or digital dimmable control gear optional. High output T5 lamp control gear is also available.



Four louvre attachments are available as standard including a low iridescent specular (Cat.2 200) and semi specular (Cat.2 500) Miro wedge louvre to match lamp configuration and retained by positive locating leaf springs. For lower specification areas a one piece polycarbonate Tp (a) dish controller is available.

SPECIFICATION

Body

- Individual or continuously mounting with corner units
- Inter-connecting wiring facility for continuous mounting
- Rigidly constructed body
- Integral fused high frequency control gear
- Alternative gear options available
- Luminaire shown AS123 228/WB2/SP1
- Three backplate formats
- 'Spiderpak' wire suspension kit for 1.0m and 2.0m drop
Add suffix 'SP1' and 'SP2' respectively


Options

- **WB2** : 200 cd. specular Miro wedge louvre
- **WB5** : 500 cd. semi specular wedge louvre
- **WSW** : Semi specular wedge with white reflector louvre
- **WBL** : White blade with semi specular reflector louvre
- **PDP** : Polycarbonate Tp (a) prismatic dish diffuser

Up / Downlighting suffix :-

- /90** 90% Downward 10% Upward light output
- /70** 70% Downward 30% Upward light output

- /SP1** 1.0m wire suspension 'Spiderpak' kit
- /SP2** 2.0m wire suspension 'Spiderpak' kit

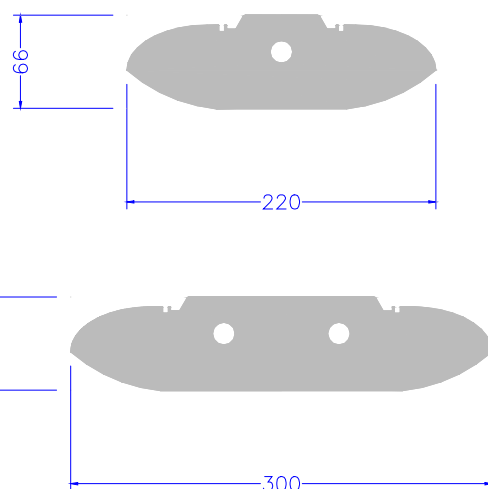

Cat. No.	Dimensions	Lampways	Approx. Wt.
AS122 128/WB2	220 x 1182 x 66	1 x 1200mm 28w T5	6.2 kg
AS123 228/WB2	300 x 1182 x 66	2 x 1200mm 28w T5	6.4 kg
AS152 135/WB2	220 x 1482 x 66	1 x 1500mm 35w T5	7.9 kg
AS153 235/WB2	300 x 1482 x 66	2 x 1500mm 35w T5	8.1 kg
AS66 314/WB2	600 x 582 x 66	3 x 600mm 14w T5	5.0 kg
AS66 414/WB2	600 x 582 x 66	4 x 600mm 14w T5	5.1 kg
AS66 3x114/WB2	600 x 582 x 66	3x1 600mm 14w T5	5.0 kg
AS66 2x214/WB2	600 x 582 x 66	2x2 600mm 14w T5	5.2 kg

Change WB2 suffix to alternative if required e.g. AS123 228/WB2 becomes AS123 228/PDP

EMERGENCY Add suffix to above catalogue references

/M3 Integrally mounted self contained 3 hour emergency

/ST Integral 'Self Test' for emergency luminaires only
i.e. AS66 314/WB2/M3/ST