

The 'RM' range of recessed modular luminaires are designed to utilise the advantages of T5 lamp technology. With a recess depth of only 60mm clear advantages can be easily used when designing the modern office.

The canopy is constructed from zintec sheet steel with perforated or solid infill sections finished 30% gloss. Alternative paint finishes available on request.

Fused high frequency control gear is offered as standard with analogue or digital dimmable control gear optional. High output T5 lamp control gear is also available.

Four louvre attachments are available as standard including a low iridescent specular (Cat.2 200) and semi specular (Cat.2 500) Miro wedge louvre to match lamp configuration and retained by positive locating spring clips.





SPECIFICATION

Body

- Rigidly constructed zintec sheet steel body
- Suitable for exposed T and concealed grid ceiling types
- Integral fused high frequency control gear
- Alternative gear options available
- Luminaire shown RM66 3x114/WB2
- Easy to use side suspension brackets (Concealed grid version)

Options

- **WB2** : 200 cd. specular Miro wedge louvre
- **WB5** : 500 cd. semi specular wedge louvre
- **WSW** : Semi specular wedge with white reflector louvre
- **WBL** : White blade with semi specular reflector louvre
- **AH** : 25 litres per second air handling
- **SA13** : Suitable for SAS130 ceiling grid (alternative systems available to order)
- **DO** : Dropped diffused side defectors; prefix louvre attachment e.g. **DOWB2**
- **DP** : Dropped perforated side defectors; prefix louvre attachment e.g. **DPWB2**

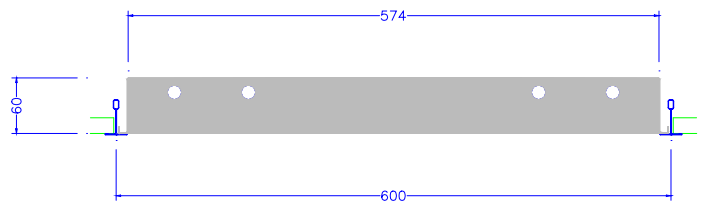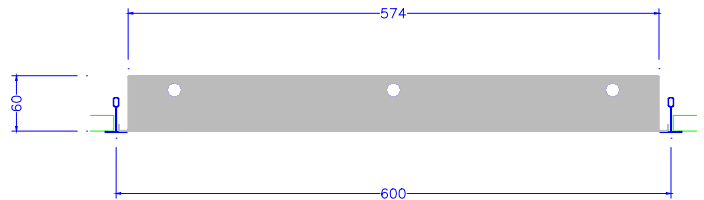

Cat. No.	Dimensions	Lampways	Approx. Wt.
RM123 128/WB2	274 x 1174 x 60	1 x 1200mm 28w T5	6.4 kg
RM123 228/WB2	274 x 1174 x 60	2 x 1200mm 28w T5	6.5 kg
RM153 135/WB2	274 x 1474 x 60	1 x 1500mm 35w T5	8.2 kg
RM153 235/WB2	274 x 1474 x 60	2 x 1500mm 35w T5	8.3 kg
RM66 314/WB2	574 x 574 x 60	3 x 600mm 14w T5	5.3 kg
RM66 414/WB2	574 x 574 x 60	4 x 600mm 14w T5	5.4 kg
RM66 3x114/WB2	574 x 574 x 60	3x1 600mm 14w T5	5.3 kg
RM66 2x214/WB2	574 x 574 x 60	2x2 600mm 14w T5	5.5 kg

Change WB2 suffix to alternative if required e.g. RM123 128/WB2 becomes RM123 128/WBL

EMERGENCY Add suffix to above catalogue references

/M3 Integrally mounted self contained 3 hour emergency

/ST Integral 'Self Test' for emergency luminaires only i.e. RM66 314/WB2/M3/ST