

The 'ET' range of recessed modular Exposed T ceiling luminaires are designed for compatibility with 15mm and 24mm T grid ceiling systems.

The canopy is constructed from zintec sheet steel finished gloss white.

Fused high frequency control gear is offered as standard with analogue or digital dimmable control gear optional.

Four louvre attachments are available as standard including a low iridescent specular ( Cat.2 200) and semi specular ( Cat.2 500 ).

Low iridescent aluminium wedge louvres to match lamp configuration retained by positive lift and tilt location. For lower specification areas a moulded polycarbonate Tp (a) dish controller is available.





## SPECIFICATION

### Body

- Solidly constructed zintec sheet steel canopy finished epp gloss white
- Suitable for 15mm or 24mm T ceiling systems
- Integral fused high frequency control gear
- Alternative gear options available
- Luminaire shown ET66 418HF WB2 24

### Options

- **WB2** : 200 cd. specular wedge louvre
- **WB5** : 500 cd. semi specular wedge louvre
- **WSW** : Semi specular wedge with white reflector louvre
- **WBL** : White blade with semi specular reflector louvre
- **PDP** : Polycarbonate Tp (a) prismatic dish diffuser
- **PSP** : Polycarbonate Tp (a) prismatic sheet diffuser
- **AH** : 25 litres per second air handling ( on louvred versions )
- **15T** : 15mm exposed T ceiling grid
- **24T** : 24mm exposed T ceiling grid

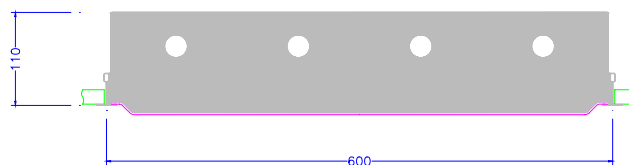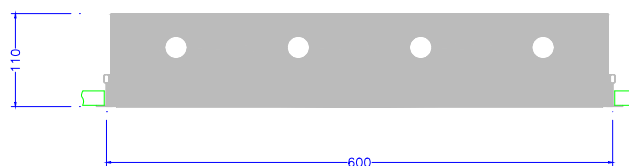

Cat. No.	Nom. Dimensions	Lampways	Approx. Wt.
<b>ET36 218HF/WB2</b>	300 x 600 x 110	2 x 600mm 18w T8	5.0 kg
<b>ET312 236HF/WB2</b>	300 x 1200 x 110	2 x 1200mm 36w T8	5.6 kg
<b>ET315 258HF/WB2</b>	300 x 1500 x 110	2 x 1500mm 58w T8	6.2 kg
<b>ET318 270HF/WB2</b>	300 x 1800 x 110	2 x 1800mm 70w T8	7.1 kg
<b>ET66 318HF/WB2</b>	600 x 600 x 110	3 x 600mm 18w T8	5.0 kg
<b>ET66 418HF/WB2</b>	600 x 600 x 110	4 x 600mm 18w T8	5.1 kg
<b>ET612 336HF/WB2</b>	600 x 1200 x 110	3 x 1200mm 36w T8	8.5 kg
<b>ET612 436HF/WB2</b>	600 x 1200 x 110	4 x 1200mm 36w T8	8.7 kg

Change WB2 suffix to alternative if required e.g. ET66 318HF/WB2 24 becomes ET66 318HF/PDP 24

**EMERGENCY** Add suffix to above catalogue references

**/M3** Integrally mounted self contained 3 hour emergency

**/ST** Integral 'Self Test' for emergency luminaires only  
i.e. ET66 318HF/WB2/M3/ST