

The 'CG' range of quality recessed modular luminaires are designed for compatibility with most concealed grid ceiling types offering the interior designer an ideal solution with the highest degree of visual comfort.

The canopy is constructed from zintec sheet steel finished RAL9010 20% gloss.

Fused high frequency control gear is offered as standard with analogue or digital dimmable control gear optional.

Four louvre attachments are available as standard including a low iridescent specular (Cat.2 200) and semi specular (Cat.2 500).

Miro wedge louvres to match lamp configuration retained by positive locating spring clips offer up to 10% greater Light Output Ratio . For lower specification areas a one piece polycarbonate Tp (a) dish controller is available with an additional IP54 rating available for more arduous areas.





SPECIFICATION

Body

- Solidly constructed zintec sheet steel canopy finished RAL9010 20% gloss
- Easy to use side suspension brackets
- Compatible with most ceiling types
- Integral fused high frequency control gear
- Alternative gear options available
- Luminaire shown CG66 318HF WB2

Options

- **WB2** : 200 cd. specular wedge louvre
- **WB5** : 500 cd. semi specular wedge louvre
- **WSW** : Semi specular wedge with white reflector louvre
- **WBL** : White blade with semi specular reflector louvre
- **PDP** : Polycarbonate Tp (a) prismatic dish diffuser
- **IP54** : Sealed to IP54 requirements
- **AH** : 25 litres per second air handling (on louvred versions)

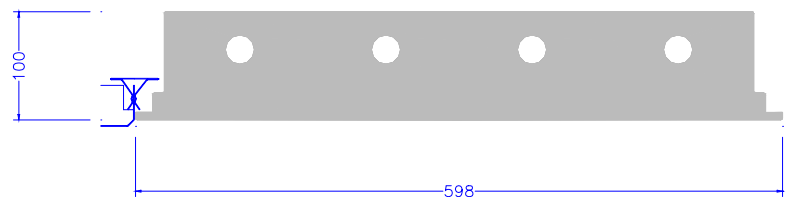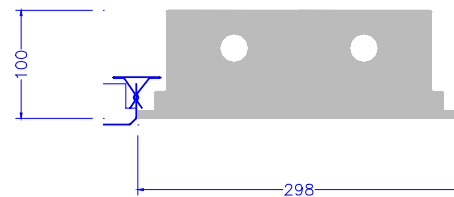

Cat. No.	Dimensions	Lampways	Approx. Wt.
CG36 218HF/WB2	298 x 598 x 100	2 x 600mm 18w T8	5.0 kg
CG312 236HF/WB2	298 x 1198 x 100	2 x 1200mm 36w T8	6.4 kg
CG315 258HF/WB2	298 x 1498 x 100	2 x 1500mm 58w T8	7.9 kg
CG318 270HF/WB2	298 x 1798 x 100	2 x 1800mm 70w T8	8.8 kg
CG66 318HF/WB2	598 x 598 x 100	3 x 600mm 18w T8	6.0 kg
CG66 418HF/WB2	598 x 598 x 100	4 x 600mm 18w T8	6.1 kg
CG612 336HF/WB2	598 x 1198 x 100	3 x 1200mm 36w T8	11.0 kg
CG612 436HF/WB2	598 x 1198 x 100	4 x 1200mm 36w T8	11.2 kg

Change WB2 suffix to alternative if required e.g. CG66 318HF/WB2 becomes CG66 318HF/PDP

EMERGENCY Add suffix to above catalogue references

/M3 Integrally mounted self contained 3 hour emergency

/ST Integral 'Self Test' for emergency luminaires only
i.e. CG66 318HF/WB2/M3/ST