


The 'DIR' range of recessed modular Direct / Indirect luminaires offer added visual appearance for modern interiors such as offices, canteens, foyers and corridors. Flexibility is maintained as luminaires are designed for compatibility with most popular ceiling systems.

The canopy is constructed from either zintec sheet steel as standard or 0.8mm thick aluminium sheet finished RAL9010 20% gloss polyester powder paint.

Fused high frequency control gear is offered as standard with analogue or digital dimmable control gear optional ; all being accessible from within the canopy.

Two versions are offered, 'PDB' (Perforated Dropped Basket) and 'PB' (flush Perforated Basket). The lamps are shrouded by a diffused profiled micro perforated 'Basket' retained to the luminaire by sprung action and provide for an ideal solution to economic direct indirect lighting of interiors.

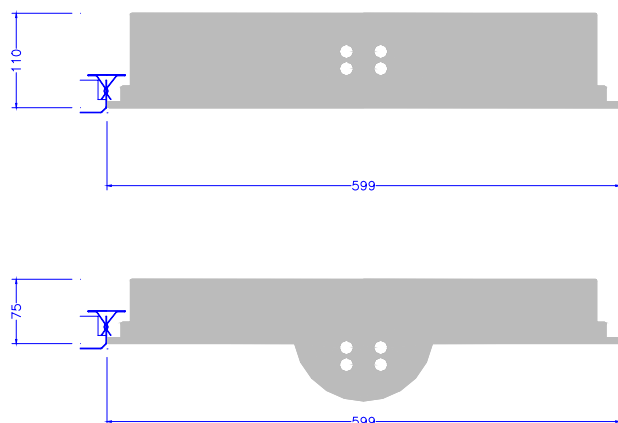

SPECIFICATION

Body

- Body compatible with 15mm, 24mm exposed T and sprung T ceiling systems
- Enclosed solidly constructed zintec steel or aluminium body
- All bodies with welded and finished corners
- Integral fused high frequency control gear
- Alternative gear options available
- Luminaire shown DIR66 155 PB
- Air handling available

Basket

- Micro perforated
- Projected or flush to ceiling line
- Positive retention by spring clips

Options

- Welded aluminium body prefix luminaire reference with "A"

Cat. No.	Dimensions	Lampways	Approx. Wt
DIR55 136/PB	499 x 499 x 110	1 x 36w TC-L	5.4 kg
DIR55 236/PB	499 x 499 x 110	2 x 36w TC-L	5.4 kg
DIR66 140/PB	599 x 599 x 110	1 x 40w TC-L	6.7 kg
DIR66 240/PB	599 x 599 x 110	2 x 40w TC-L	6.7 kg
DIR66 155/PB	599 x 599 x 110	1 x 55w TC-L	6.7 kg
DIR66 255/PB	599 x 599 x 110	2 x 55w TC-L	6.7 kg
DIR55 136/PDB	499 x 499 x 75	1 x 36w TC-L	5.4 kg
DIR55 236/PDB	499 x 499 x 75	2 x 36w TC-L	5.4 kg
DIR66 140/PDB	599 x 599 x 75	1 x 40w TC-L	6.7 kg
DIR66 240/PDB	599 x 599 x 75	2 x 40w TC-L	6.7 kg
DIR66 155/PDB	599 x 599 x 75	1 x 55w TC-L	6.7 kg
DIR66 255/PDB	599 x 599 x 75	2 x 55w TC-L	6.7 kg

EMERGENCY Add suffix to above catalogue references

/M3 Integrally mounted self contained 3 hour emergency

/ST Integral 'Self Test' for emergency luminaires only
i.e. DIR66 255 PDB/M3/ST